




BUSHINGS

FIG. #9 - Reducing Bushing, Spigot x Bell


Size	"A"	"B"
1	1.06	1/2 thru 3/4
1-1/2	1.25	1/2 thru 1
2	1.81	1/2 thru 1-1/2
2-1/2	1.81	1/2 thru 2
3	1.81	1/2 thru 2-1/2
4	1.81	1/2 thru 3
6	2.25	1/2 thru 5
8	2.50	1/2 thru 6
10	2.75	1/2 thru 8
12	3.00	1/2 thru 10

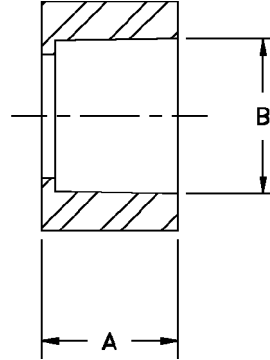

Larger sizes available on request. Bushings 6" and larger not recommended for pressure greater than 50 psi. Customer to provide spigot and socket diameters at time of order.

FIG. #10 - Threaded Reducing Bushing, Spigot x Female NPT

Size	"A"	"NPT"
1	1.06	1/2 thru 3/4
1-1/2	1.25	1/2 thru 1-1/4
2	1.81	1/2 thru 1-1/2
2-1/2	1.81	1/2 thru 2
3	1.81	1/2 thru 2-1/2
4	1.81	1/2 thru 3
6	2.25	1/2 thru 4
8	2.50	1/2 thru 6
10	2.75	1/2 thru 8
12	3.00	1/2 thru 8

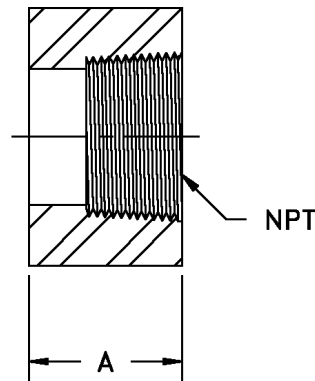

Larger sizes available on request. Stainless steel bushings available on special orders. Bushings 6" and larger not recommended for pressure greater than 50 psi. Customer to provide spigot and socket diameters at time of order.