



Industrial Fiberglass Specialties, Inc.

521 Kiser Street, Dayton, OH 45404-1641

Phone: (937) 222-9000 • Fax: (937) 222-9020


Email: sales@ifs-frp.com • Web: www.ifs-frp.com

Product Catalog

24 February 2004

FIG. #20-25 - 90 Degree Elbow, Short or Long Radius, Bell End (25 psi or Duct Rated)

Size	"A" Short Radius	"AA" Long Radius	"B" Short & Long Radius	Wt.
6	6.00	9.00	1.63	7.10
8	8.00	12.00	1.63	12.20
10	10.00	15.00	1.76	14.10
12	12.00	18.00	1.88	16.00
14	14.00	21.00	1.75	31.40
16	16.00	24.00	1.75	46.50
18	18.00	27.00	1.88	78.20
20	20.00	30.00	2.00	95.70
24	24.00	36.00	2.25	138.60
30	30.00	45.00	2.38	214.00
36	36.00	54.00	2.38	384.60

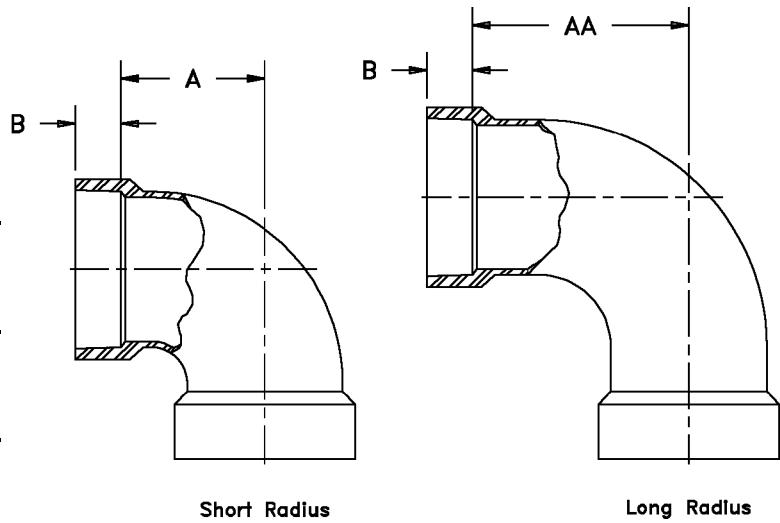

Bell ends are designed to fit pipe with O.D.s as shown in Fig. #1. Please state O.D. or manufacturer when ordered bell end fittings for pipe with different O.D.s.

Note: Bell dimensions and weights are for 25 psi or duct rated elbows. See Fig. #20-S/20-L for 100/150 pressure rated elbows.