




90 DEGREE ELBOWS

FIG. #20-S/20-L - 90 Degree Elbow, Short or Long Radius, Bell End

Size	"A" Short Radius 20-S	"AA" Long Radius 20-L	"B" Short & Long Radius	Wt.
1/2	.50	N.A.	.87	0.3
3/4	.75	N.A.	1.00	0.4
1	1.00	1.50	1.06	0.7
1-1/2	1.50	2.50	1.25	1.0
2	2.00	3.00	1.81	1.5
2-1/2	2.50	3.75	1.81	1.7
3	3.00	4.50	1.81	2.5
4	4.00	6.00	1.81	3.8
5	C.F.	C.F.	C.F.	C.F.
6	6.00	9.00	2.25	7.5
8	8.00	12.00	2.50	13.0
10	10.00	15.00	2.75	20.0
12	12.00	18.00	3.00	28.0
14	14.00	21.00	3.00	44.0
16	16.00	24.00	3.50	66.0
18	18.00	27.00	3.75	104.0
20	20.00	30.00	4.75	130.0
24	24.00	36.00	4.75	220.0
30	30.00	45.00	4.06	387.0
36	36.00	54.00	4.30	708.0

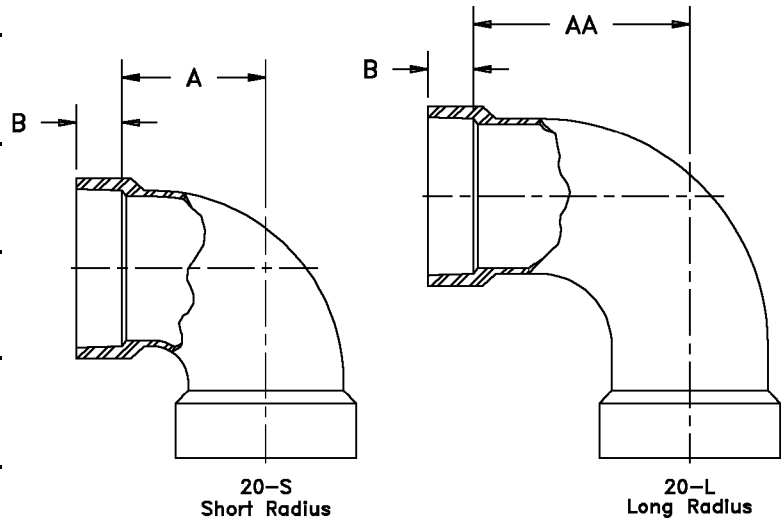

N.A. - Fitting not available. C.F. - Consult factory for dimensions

Elbows 1/2" through 12" are rated for 150 psi. Elbows 14" and larger are rated for 100 psi. Higher pressure ratings are available. Bell-Ends are designed to fit pipe with O.D.s as shown in Fig. #1. Please state O.D. or manufacturer when ordered bell-end fittings for pipe with different O.D.s.

Note: Bell dimensions and weights are for 100/150 psi pressure rated elbows. See Fig. #20-25 for 25 psi and duct rated elbows.