


FIG. #22-S/22-L - 90 Degree Elbow, Short or Long Radius, ANSI 150 lb. Flanged

Size	"A"	"AA"	Wt.
	Short Radius 22-S	Long Radius 22-L	
1/2	2.50	N.A.	1.4
3/4	2.75	N.A.	1.7
1	3.50	5.00	2.2
1-1/2	4.00	6.00	3.4
2	4.50	6.50	5.5
2-1/2	5.00	6.75	6.7
3	5.50	7.75	8.9
4	6.50	9.00	13.8
5	C.F.	C.F.	C.F.
6	8.00	11.50	22.6
8	9.00	14.00	42.4
10	11.00	16.50	60.2
12	12.00	19.00	92.8
14	14.00	21.50	105.0
16	15.00	24.00	130.0
18	16.50	26.50	170.0
20	18.00	29.00	230.0
24	22.00	34.00	400.0
30	C.F.	C.F.	C.F.
36	C.F.	C.F.	C.F.

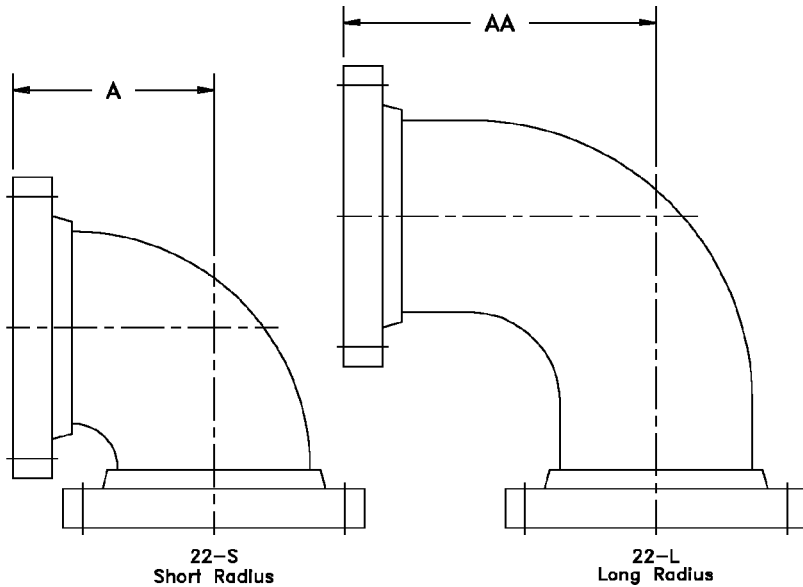

N.A. - Fitting not available. C.F. - Consult factory for dimensions.

Elbows 1/2" through 12" rated for 150 psi. Elbows 14" and larger rated for 100 psi.

Higher pressure ratings are available. Fittings meet the centerline-to-flange-face dimension of ANSI B16.5, 150 lb.

When ordering specify Fig. #22-S for short radius and Fig. #22-L for long radius elbow per above dimensions.

Short radius elbows 10" through 24" and long radius elbows, 14" through 24" are mitered and overwound. Bolt and gasket sets are available. Please see Fig. #101.