




**Industrial Fiberglass Specialties, Inc.**  
521 Kiser Street, Dayton, OH 45404-1641  
Phone: (937) 222-9000 • Fax: (937) 222-9020  
Email: sales@ifs-frp.com • Web: www.ifs-frp.com

**Product Catalog**  
24 February 2004

**FIG. #30-25 - 45 Degree Elbow, Bell End (25 psi or Duct Rated)**

Size	"A"	"B"	Wt.
6	3.75	1.63	5.80
8	5.00	1.63	7.40
10	6.25	1.76	10.70
12	7.50	1.88	14.40
14	8.81	1.75	20.00
16	10.00	1.75	23.50
18	11.25	1.88	39.40
20	12.50	2.00	48.40
24	15.00	2.25	68.80
30	18.63	2.38	105.50
36	22.50	2.38	189.10

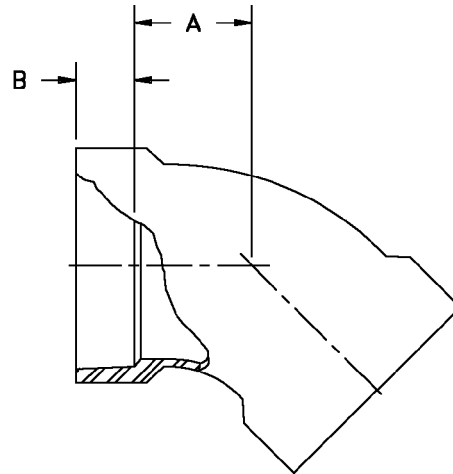

Bell ends are designed to fit pipe with O.D.s as shown in Fig. #1. Please state pipe O.D. or manufacturer when ordering bell end fittings for pipe with different O.D.s.

Note: Bell dimensions and weights are for 25 psi or duct rated elbows. See Fig. #20-S/20-L for 100/150 psi pressure rated elbows.