




Industrial Fiberglass Specialties, Inc.
521 Kiser Street, Dayton, OH 45404-1641
Phone: (937) 222-9000 • Fax: (937) 222-9020
Email: sales@ifs-frp.com • Web: www.ifs-frp.com

Product Catalog
24 February 2004

FIG. #31 - 45 Degree Elbow, Plain End

| Size | "A" | Wt. |
|-------|-------|------|
| 3/4 | 1.37 | 0.3 |
| 1 | 1.63 | 0.5 |
| 1-1/2 | 2.13 | 0.7 |
| 2 | 2.38 | 1.2 |
| 2-1/2 | 2.88 | 1.6 |
| 3 | 2.88 | 2.2 |
| 4 | 3.87 | 2.9 |
| 5 | C.F. | C.F. |
| 6 | 4.87 | 6.4 |
| 8 | 5.37 | 8.4 |
| 10 | 6.37 | 16.0 |
| 12 | 7.37 | 27.0 |
| 14 | 8.75 | 22.0 |
| 16 | 10.00 | 26.0 |
| 18 | 11.25 | 30.0 |
| 20 | 12.50 | 35.0 |
| 24 | 15.00 | 42.0 |
| 30 | C.F. | C.F. |
| 36 | C.F. | C.F. |

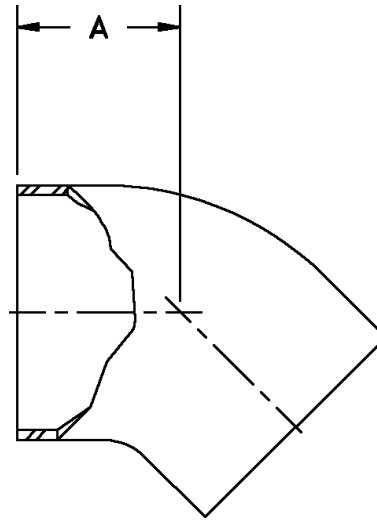

C.F. - Consult factory dimensions.

Meets NBS PS 15-69. Plain-end fittings are designed for butt-and-wrap joining. Butt-and-wrap-kits are available. Please see Fig. #90. Elbows 1" through 12" are rated for 150 psi. Elbows 14" and larger are rated for 100 psi. Higher pressure ratings are available.

NO RETURNS ALLOWED