



WYES

FIG. #84 - True Wye, Bell End

Size	"A"	"B"	"C"	Wt.
1	2.50	1.06	3.50	1.0
1-1/2	3.00	1.25	4.00	1.5
2	3.50	1.81	4.50	2.0
2-1/2	4.00	1.81	5.00	2.8
3	4.00	1.81	5.50	3.5
4	5.00	1.81	6.50	6.0
6	6.00	2.25	8.00	10.0
8	7.00	2.50	9.00	17.0
10	10.00	2.75	13.00	27.0
12	11.50	3.00	15.00	44.0

Larger fittings with bell-ends are available on request. All wyes are rated for 150 psi. Higher pressure ratings are available.


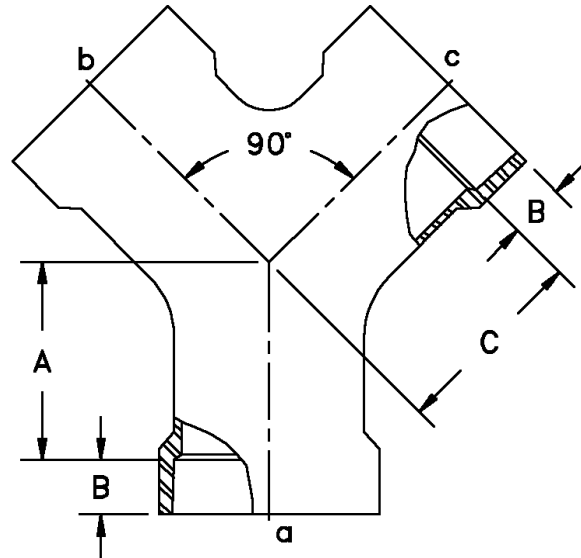


FIG. #85 - True Wye, Plain End

Size	"A"	"B"	Wt.
1	2.38	3.38	2.8
1-1/2	2.88	3.88	3.2
2	3.38	4.38	3.6
2-1/2	3.88	4.88	5.0
3	3.88	5.38	6.6
4	4.88	6.38	8.7
6	5.88	7.88	15.0
8	6.88	8.88	27.0
10	9.88	12.88	47.0
12	11.38	14.88	67.0
14	12.75	17.25	85.0
16	14.75	19.75	98.0
18	16.75	21.75	120.0
20	18.75	24.75	145.0
24	21.75	28.75	170.0

Plain end fittings are designed for butt and wrap joining. Butt and wrap kits are available, see Fig. #90. Wyes 1" to 12" are rated for 150 psi. Wyes 14" and larger are rated for 100 psi. Higher pressure ratings are available.

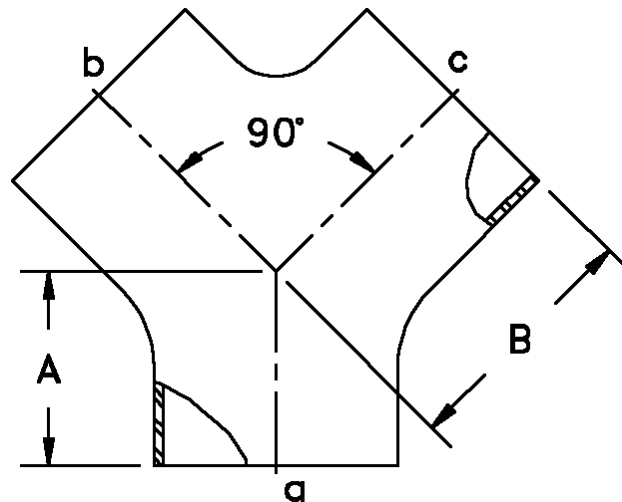

NO RETURNS ALLOWED