


Industrial Fiberglass Specialties, Inc.
521 Kiser Street, Dayton, OH 45404-1641
Phone: (937) 222-9000 • Fax: (937) 222-9020
Email: sales@ifs-frp.com • Web: www.ifs-frp.com

Product Catalog
24 February 2004

MISCELLANEOUS

FIG. #99 - End Dome

Size	"A"	"B"	"C"	Wt.
6	6.00	3.38	1.50	3.0
8	8.00	3.88	1.50	4.5
10	10.00	4.38	1.50	6.2
12	12.00	4.88	1.50	6.8
14	14.00	5.38	1.50	9.3
16	16.00	5.88	1.50	12.0
18	18.00	6.38	1.50	14.4
20	20.00	6.88	1.50	23.4
24	24.00	7.88	1.50	34.5
30	30.00	9.38	1.50	45.0
36	36.00	10.88	1.50	61.0
42	42.00	12.00	1.50	71.0
48	48.00	13.50	1.50	81.0
54	54.00	15.00	1.50	91.0

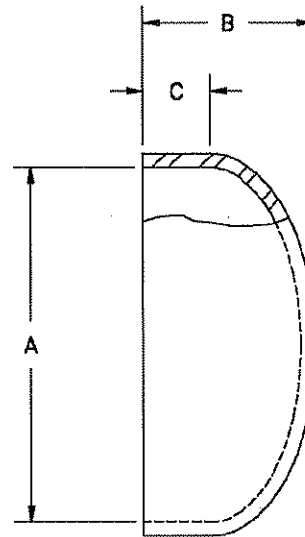

End domes are designed for butt and wrap joining onto pipe. End domes 6" through 12" are rated for 150 psi. End domes 14" and larger are rated for 100 psi. Higher pressure ratings are available. Please see Fig. #90 for butt and wrap kits.

NO RETURNS ALLOWED